

# CL400 2V 400Ah(10hr)

The rechargeable batteries are lead-lead dioxide systems. The dilute sulfuric acid electrolyte is absorbed by separators and plates and thus immobilized. Should the battery be accidentally overcharged producing hydrogen and oxygen, special one-way valves allow the gases to escape thus avoiding excessive pressure build-up. Otherwise, the battery is completely sealed and is, therefore, maintenance-free, leak proof and usable in any position.



## Battery Construction


Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Sulfuric acid

## General Features

- Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance or water adding.
- Not restricted for air transport-complies with IATA/ICAO Special Provision A67.
- UL-recognized component.
- Can be mounted in any orientation.
- Computer designed lead, calcium tin alloy grid for high power density.
- Long service life, float or cyclic applications.
- Maintenance-free operation.
- Low self discharge.

## Dimensions and Weight

Length(mm / inch).....210 / 8.27  
 Width(mm / inch).....176 / 6.93  
 Height(mm / inch).....330 / 12.99  
 Total Height(mm / inch).....367 / 14.45  
 Approx. Weight(Kg / lbs).....28 / 61.7

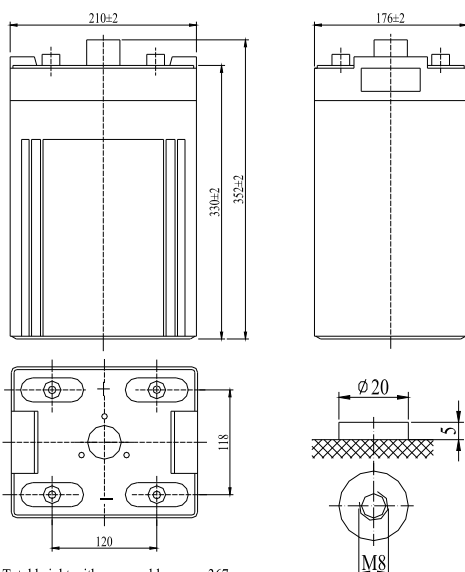

Total height with removable cover: 367

## Performance Characteristics









Nominal Voltage .....2V  
 Number of cell .....1  
 Design Life .....20 years  
 Nominal Capacity 77°F(25°C)  
 10 hour rate (40A, 1.8V)..... 400Ah  
 5 hour rate (72A, 1.75V)..... 360Ah  
 1 hour rate (247A, 1.6V)..... 247Ah  
 Internal Resistance  
 Fully Charged battery 77°F(25°C) ..... 0.7mOhms  
 Self-Discharge  
 3% of capacity declined per month at 20°C(average)  
 Operating Temperature Range  
 Discharge ..... -20~60°C  
 Charge ..... -10~60°C  
 Storage ..... -20~60°C  
 Max. Discharge Current 77°F(25°C) .....2000A(5s)  
 Charge Methods: Constant Voltage Charge 77°F(25°C)  
 Cycle use ..... 2.35-2.45V  
 Maximum charging current ..... 80A  
 Temperature compensation ..... -5.0mV/°C  
 Standby use ..... 2.25-2.3V  
 Temperature compensation ..... -3.3mV/°C

## Discharge Constant Current (Amperes at 77°F25°C)

End Point Volts/Cell	10min	15min	30min	45min	1h	3h	5h	10h
1.60V	732	587	427	325	247	114	77.7	43.0
1.65V	694	559	408	312	238	110	75.9	42.4
1.70V	654	530	388	298	229	106	74.0	41.7
1.75V	614	500	368	284	219	102	72.0	40.9
1.80V	573	470	347	269	208	98	69.4	40.0

## Discharge Constant Power (Watts at 77°F25°C)

End Point Volts/Cell	10min	15min	30min	45min	1h	2h	3h	5h
1.60V	1281	909	740	641	493	310	214	140
1.65V	1206	860	703	610	471	286	209	138
1.70V	1131	810	665	576	449	270	203	135
1.75V	1057	760	626	543	425	260	197	132
1.80V	983	710	587	509	401	246	185	125

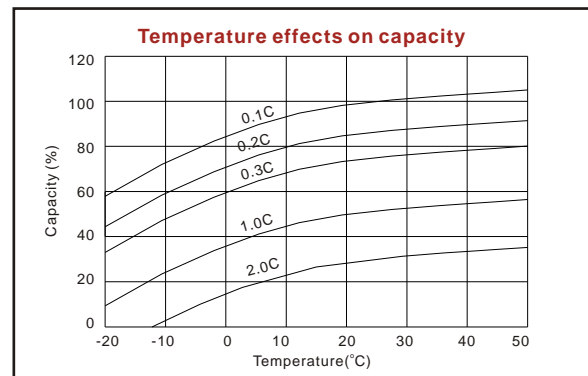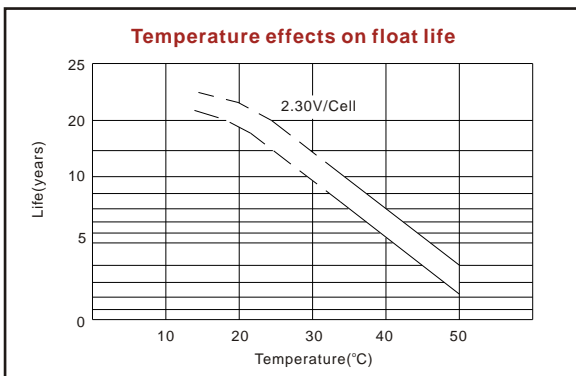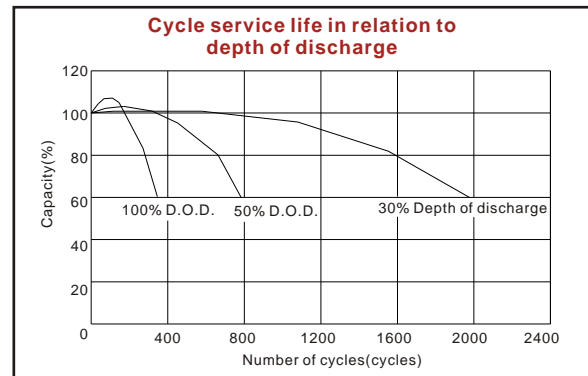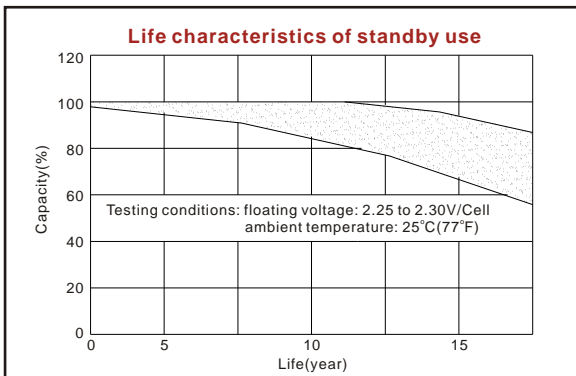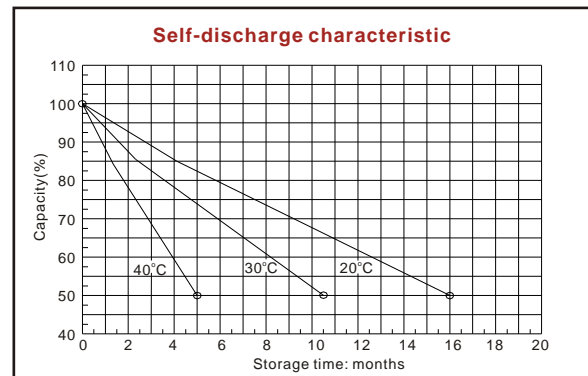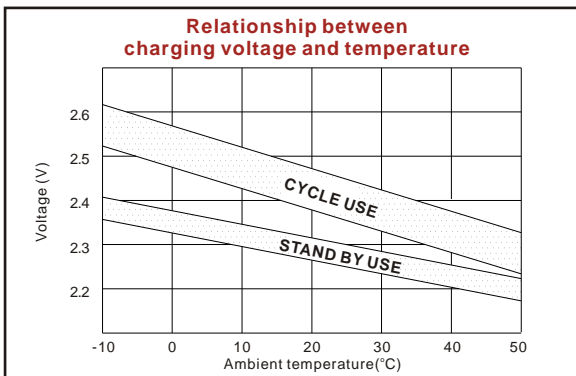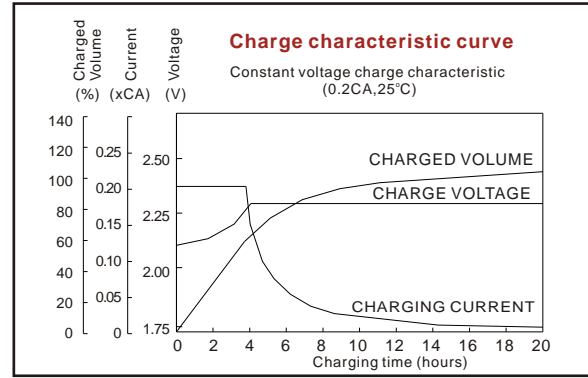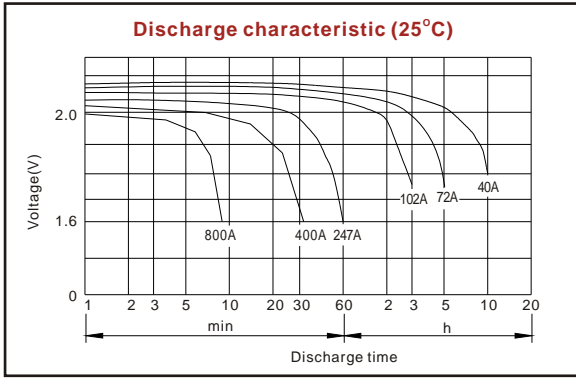

ISO9001:2000

MH25860

G4M19906-9202-E-16

**Shenzhen Center Power Tech. Co., Ltd.**  
 RM 1801, 18/F, Cangsong Bldg., Terra 6 Rd, Chegongmiao, Futian District, Shenzhen 518040 China  
 Tel: (+86-755) 8343 5688 Fax: (+86-755) 8384 9585 E-mail: sales@vision-batt.com

[www.vision-batt.com](http://www.vision-batt.com)